

4" Round Canopy

700DJ4RF_

1.7




GENERAL PRODUCT INFORMATION:



This product is suitable for indoor dry locations only.


This product can be dimmed with a standard incandescent dimmer.

Minimum volume of the electrical box must be 6 cubic inches (98 cubic centimeter).

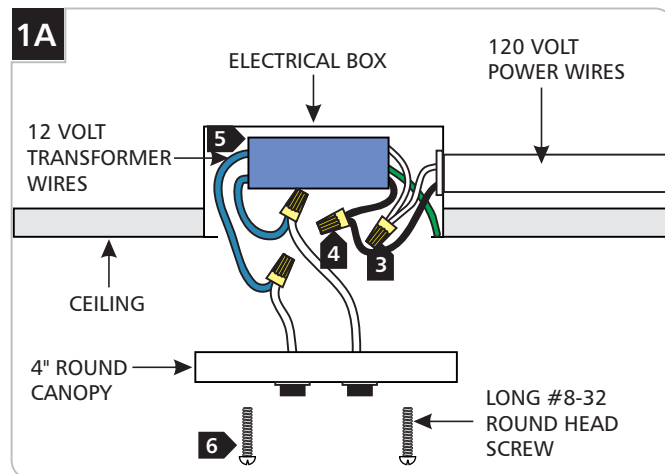

NOTE: Use the provided universal round crossbar when the canopy holes do not line up with the electrical box holes.

- 1** Turn the power to the electrical box off.
- 2** In accordance with local electrical codes, ground the transformer green wire.
- 3** Connect the 120 volt white transformer wire to the neutral power line wire with a wire nut.
- 4** Connect the 120 volt black transformer wire to the hot power line wire with a wire nut.
- 5** Place the transformer and all the wires inside the electrical box. Use the adhesive pad to secure the transformer in the electrical box.
- 6** Mount the 4" round canopy to the electrical box with the two long #8-32 screws.

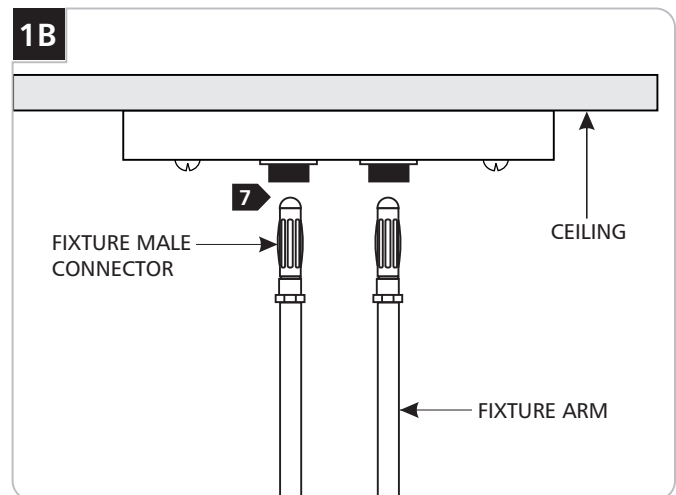

- 7** Push the two fixture male connectors all the way into the Display Jacks.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077

847.410.4400

www.techlighting.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company