

#### Features

- Decked oval shape creates a graceful and spacious bathing experience.
- Generous 6-foot length provides spacious bathing for up to two people.
- Molded lumbar support and armrests offer extra comfort while bathing.
- End drain.

#### Material

Acrylic

#### Installation

• Drop-in

## **Additional Hydrotherapy Options**

- Soaking Bath 1115-0
- BubbleMassage air bath 1114-G
- Whirlpool 1114-0
- Whirlpool + heater 1114-H

### **Recommended Products/Accessories**

K-7166-AF Bath Drain K-11677 Bath Drain K-24916 Wireless Music Kit K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-7213 27" Cable Bath Drain K-7214 27" Cable Bath Drain K-7259 Clearflo Bath Drain





## **Codes/Standards**

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

#### KOHLER<sup>®</sup> Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

Color tiles intended for reference only.

#### Color Code Description


0	White
96	Biscuit
47	Almond



Windward®



# Windward® 6' Bath K-1115

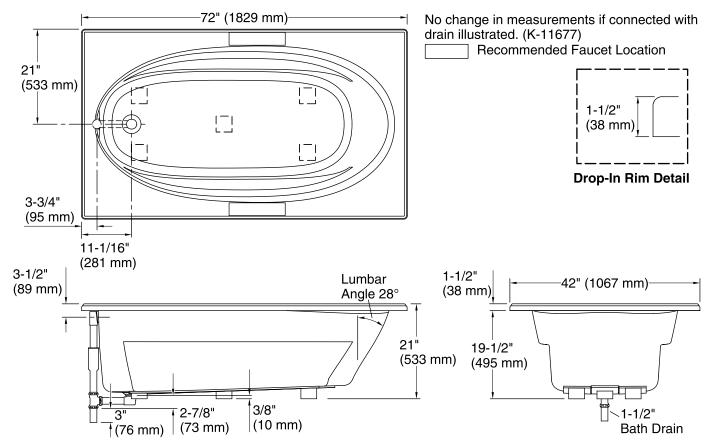

### **Technical Information**

All product dimensions are nominal.			
Installation:	Drop-in		
Drain location:	End		
Basin area, bottom:	55" x 23-1/4" (1397 mm x 591 mm)		
Basin area, top:	64" x 32" (1626 mm x 813 mm)		
Weight:	100 lbs (45.4 kg)		
Minimum floor load:	38 lbs/ft² (185.5 kg/m²)		
Water depth:	15" (381 mm)		
Water capacity:	78.5 gal (297.2 L)		
Cutout:	Drop-in, 70-1/2" x 40-1/2" (1791 mm x		
	1029 mm)		
Minimum flat for door:	3-1/16" (78 mm)		

#### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

