# GENERATION LIGHTING **CHANDELIER**

### **GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction

This product is safety listed for damp locations.


This instruction shows a typical installation.

#### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


## **SAVE THESE INSTRUCTIONS!**

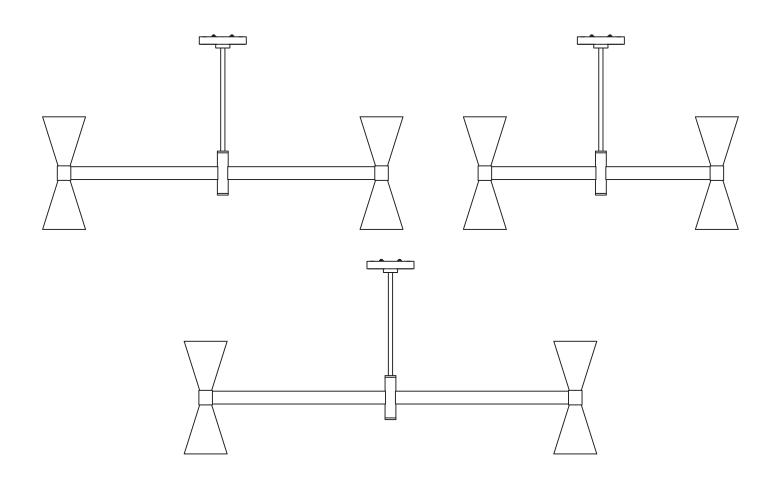

GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500 www.generationlighting.com

## Install the Fixture

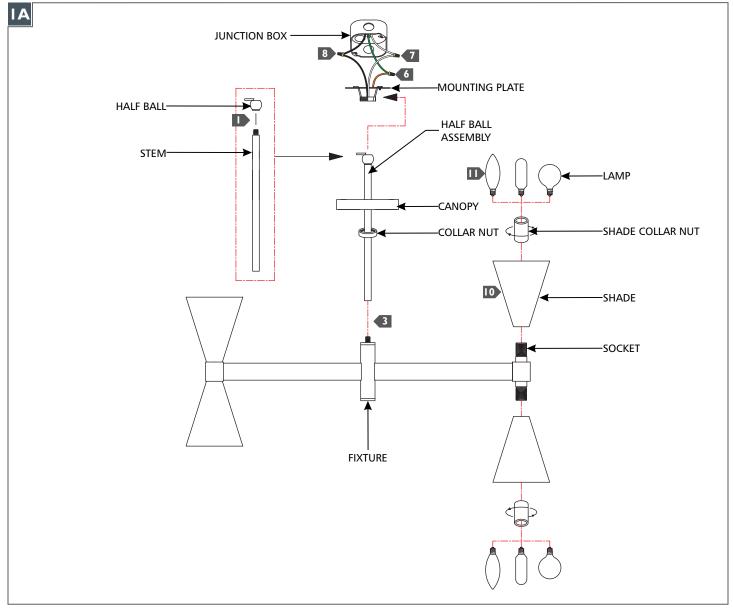

- I Screw the half ball to the stem which will be on top.
- 2 Determine the wanted height or look of the fixture with the provided stems, then assemble them by screwing them together.
- 3 Feed the fixture wires through the stem assembly, then screw the stem assembly on top of the fixture.
- 4 Feed the fixture wires through the collar nut, canopy, and the half ball assembly then screw it onto the stem assembly.
- Align and secure the mounting plate to the junction box, then slide the half ball assembly onto the mounting plate.
- 6 Connect the fixture to a suitable ground in accordance with local electrical codes.
- Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- B Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Pace all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut tightly onto the mounting plate.
- Place the shade onto the socket and secure it in place by screwing the shade collar nut onto the socket. Do not over tighten. Repeat for remaining shades.
- Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.