
Submitted Model No.:	
Specific Features:	



▲ Designate proper finish suffix



# see what Delta can do

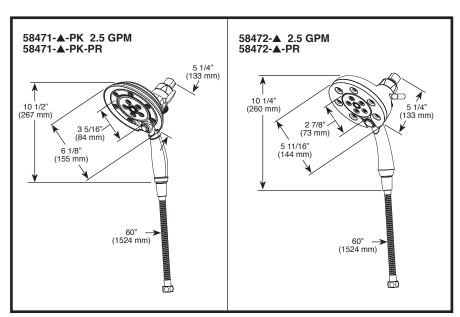

- H<sub>2</sub>Okinetic<sup>®</sup> 2-In-1 Shower
- 4-Spray Settings Hand Shower

### **FEATURES:**

- Push Button Selection
- MagnaTite<sup>®</sup> Docking
- H<sub>2</sub>Okinetic® PowerDrench Spray
- Lumicoat<sup>™</sup> Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

#### **STANDARD SPECIFICATIONS:**

- Max. flow rate 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa
- Integrated hand shower docks securely into shower head when not in use
- 4 hand shower spray settings pause is a nonpositive shut-off
- 3-Way diverter for single or shared operation of the shower head and hand shower
- Fixed shower head and hand shower all in one
- Change spray modes with push button
- 60" (1524 mm) stretchable metal hose, stretches to 82" (2083 mm) for extra reach
- Lumicoat<sup>™</sup> is not applied to the shower hose

#### **WARRANTY**

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5
  years from the date of purchase; or for commercial
  purchasers, 1 year from the date of purchase. No
  warranty is provided on batteries.

## **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.3
- ♦ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certifled check valves in series, which operate independently and are integral, nonserviceable parts of the wand assembly.