

Technical Information Bulletin


CHOICE LED Lamps



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 66268
 Description: A19/6W/30K/ND/CHOICE/STD
 UPC: 69549662681
 Case quantity: 6 / 48

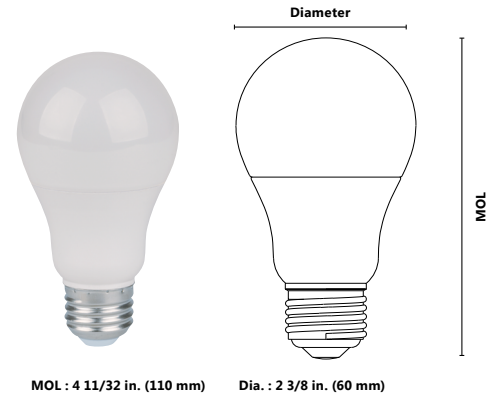

PERFORMANCE DATA

Shape: A19
 Base: E26
 Watts(W): 6
 Volts (VAC): 120
 Colour temperature (K)**: 3 000
 Average life (L70 hours): 15 000
 Initial lumens (lm)*: 568
 Initial lumens per watt (lm/W): 95
 CRI: 84
 Beam angle: 220
 Power factor: 0.6
 Operating temperature range: -20 °C to 45 °C (-4 °F to 113 °F)

*Initial lumens range: +/- 10 %

**Typical colour temperature range: +/- 5 %



CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Do not use with dimmers.
- For complete warranty information visit www.standardpro.com.
- 3 Years Limited Warranty.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____ Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.