

Installation Instructions

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Caution: This fixture is designed to be mounted on a standard wall surface and may not be suitable for all applications. If installing in a non-wood frame application, we recommend consulting a qualified builder or electrician.

To Install Back plate (Figure 1)

Component Parts

- | | | | |
|---|--------------------|---|------------------|
| A | Cross Bar | D | Fixture Assembly |
| B | Threaded Studs (2) | E | Barrel Knobs (2) |
| C | Ground Screw | | |


Caution: Be sure power is off at the main breaker box prior to installation.

1. Carefully unpack the fixture from the carton.
2. Using two machine screws (not provided), fasten the crossbar (A) to the electric box (see illustration), making sure that fixture mounting holes are level.
Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.
3. Thread studs (B) into appropriate holes in crossbar (A). Adjust the studs to proper length to ensure the fixture assembly (D) will fit snugly against the wall.

4. Using suitable wire connectors (not provided) connect fixture wires to supply wires (white to white and black to black). Run a pigtail lead from crossbar ground screw (C) to the junction box and connect all ground wires (bare copper or green to bare copper or green).
Caution: Make sure wire connectors are twisted on securely, and no bare wire is exposed.

5. Slide fixture assembly (D) over the threaded studs (B) and push firmly against the wall making sure that no wires are pinched between back plate and wall. Fasten with barrel knobs (E). Be sure that threaded studs (B) are seated in the barrel knobs (E).

6. Install bulb and decorative face plates (see instructions below).

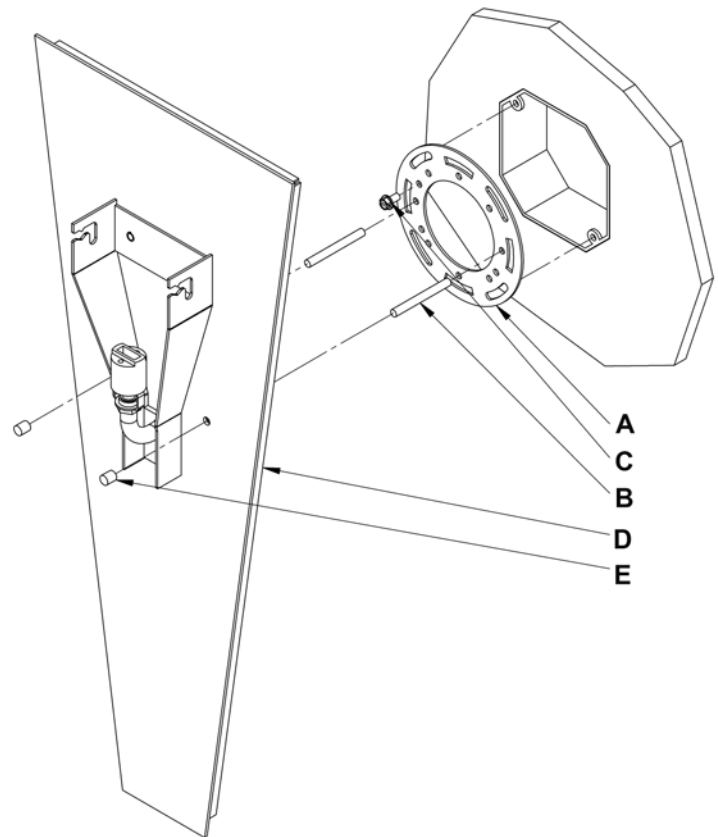

(Figure 1)

(continued)

Installation Instructions

Tapered Angle Sconce 21-3255 & 21-3256

B228


Page 2 of 2

To Install Light Bulb and Shield (Figure 2)

Component Parts

- F Socket
- G Bulb (included)
- H Bulb Shield

1. Install bulb (G). *Be careful not to touch bulb with bare hands; oil from the hands will dramatically reduce bulb life.*
2. Place bulb shield (H) over bulb (G) and thread onto socket (F). *Be careful not to over tighten.*

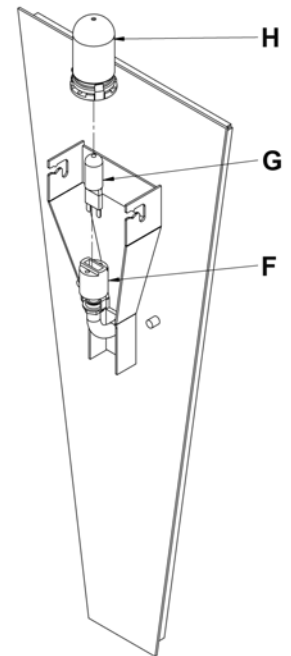


(Figure 2)

To Attach Decorative Face Plate (Figure 3)

Component Parts

- D Fixture Assembly
- I Decorative Face Plate

1. Attach decorative face plates (I) to the fixture assembly (D) by inserting the welded rod attaching the two angled plates into the slots and down into the notches. *Be sure the rod is seated into both notches.*
2. Restore electricity at main breaker.

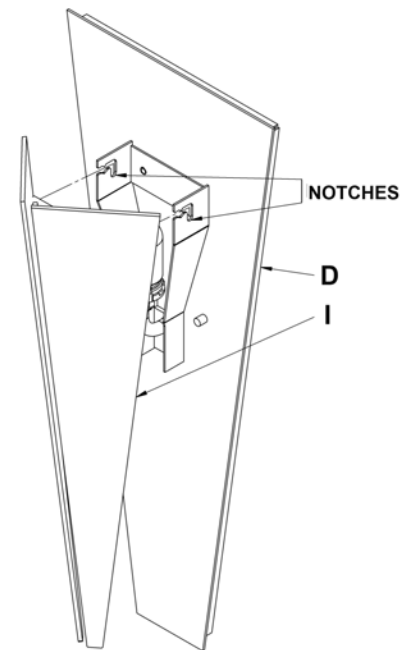

(Figure 3)

Cleaning Instructions

The unique finish on our copper accents is achieved by heating and oxidizing the surface of the raw copper.

When dusting, gently wipe the surface with a soft damp cloth using a spray wax if desired. For extra protection and a deep rich finish, a light application of paste wax once a year is desirable. Never scrub or use an abrasive.

NEVER USE AMMONIA OR SOLVENT-BASED CLEANING PRODUCTS ON THE COPPER SURFACE.

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.