

Compass®
Bathroom Sink
K-2298

#### **Features**

- Petite round design.
- No faucet holes; requires wall- or counter-mount faucet.

#### Material

Vitreous china.

#### Installation

Drop-in or under-mount.

#### **Recommended Products/Accessories**

K-9018 P-Trap

## **Included Components**

Additional Components: 1193643 Basin Clamps Adjustable linkage



ADA CSA B651

# **Codes/Standards**

ASME A112.19.2/CSA B45.1 ADA ICC/ANSI A117.1 CSA B651

# **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	95	Ice™ Grey
	7	Black Black™
	71	Seafoam Green
	97	Timberline™







# Compass® Bathroom Sink K-2298

<del>--</del>24" (610 mm)−

(203 mm) Min

(229 mm)



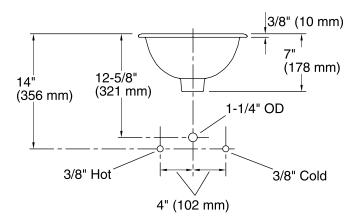

# A Drop-in 4-3/8" (137 mm) Under-mount (shown) 4-3/8" (137 mm)

**Recommended ADA Installation** 

(686 mm) 11" (279 mm)

9"

Min

#### **Technical Information**

All product dimensions are nominal.

Installation: Drop-in, Under-mount

Bowl area: Diameter: 10-5/8" (270 mm)

Water depth: 4-3/4" (121 mm)

Drain hole: 1-3/4" (44 mm)

Template: 116214-7, required, included

#### **Notes**

34"

(864 mm)

Min

Install this product according to the installation instructions.

Spout must be a minimum of 4-1/2" (114 mm) long for adequate clearance into bathroom sink. Supplied basin clamp assembly for under-mount installation requires 1" (25 mm) minimum countertop thickness. Installer must supply hardware for thinner countertops.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

