

#### Features

- 4 Riverjets and 8 hydromassage jets can be individually adjusted for water flow and direction.
- 2 variable-speed pumps for adjusting massage intensity.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Built-in heater.
- Lighted keypad.
- Floating remote control.
- Integral fill with factory-installed faucet valves.
- Spacious design accommodates multiple bathers.
- Jet trim kit (required); sold separately.
- Four pillows provide extra comfort.

#### Material

Acrylic

#### **Hydrotherapy**

- RiverBath Whirlpool
- Chromatherapy

#### Installation

Drop-in

#### **Required Products/Accessories**

K-9398 Whirlpool Trim Kit K-T9540-4 Transfer Valve Trim

#### **Recommended Products/Accessories**

K-7167 Clearflo Bath Drain

**RiverBath®** 





### **Codes/Standards**

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2 Greenguard UL 2818 - Gold

# KOHLER<sup>®</sup> Plastic Baths and Receptors Lifetime Limited Warranty KOHLER<sup>®</sup> Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description


0	White
96	Riscuit

- 96 Biscuit
- 7 Black Black<sup>™</sup>



# **KOHLER**<sub>®</sub>

# RiverBath® 6.25' Whirlpool Bath K-1397-H2

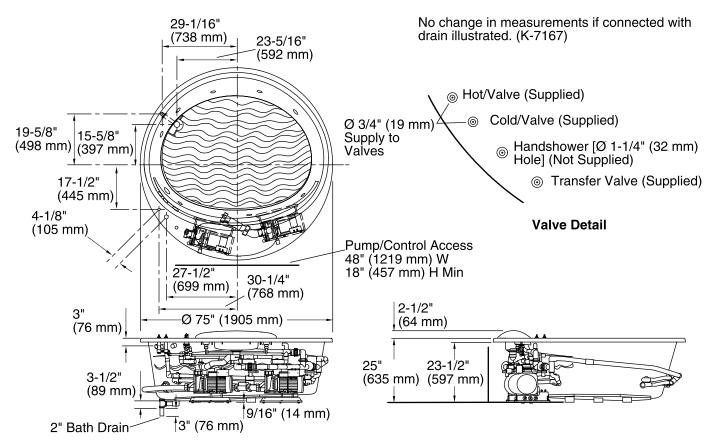

# **Required Electrical Service**

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump, Pump:240 V, 20 A, 50/60 HzHeater:240 V, 20 A, 50/60 Hz

#### **Technical Information**

All product dimensions are nominal.

Installation:	Drop-in
Drain location:	Center
Basin area, bottom:	64" x 46" (1626 mm x 1168 mm)
Basin area, top:	68" x 58" (1727 mm x 1473 mm)
Weight:	290 lbs (131.5 kg)
Minimum floor load:	54 lbs/ft² (263.7 kg/m²)
Water depth:	20" (508 mm)
Water capacity:	215 gal (813.9 L)
Template:	Drop-in, 1000554-7, required, included Drop-in, 1000555-7, required, included 1000556-7, not required, included 1000557-7, not required, included

#### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Consult local and national codes for minimum air gap requirements when installing a spout on the faucet deck other than that supplied.

