
MODERN FORMS



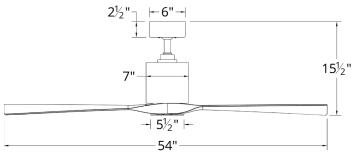

PRODUCT DESCRIPTION

Inspired by the golden age of flying, this smart fan takes technology to the next level. Pair it with the exclusive Modern Forms app to save on energy costs and intuitively create schedules that adapt to your behavior. Two simulated wood finishes contrast with the matte black or graphite housings for an understated look in interior or exterior spaces. Available option LED light kit sold separately.

SPECIFICATIONS

Construction: Aluminum Blade: 13° Pitch, 60" sweep, ABS Downrod: 1" O.D. x 4.5"H included Mounting Slope: Up to 30°

Lead Wire: 80"

Hanging Weight: 13 lbs **Total Power: 32W**

Standards: ETL/cETL Wet Location listed

FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Optional LED light kit sold separately
- Includes RF wall control
- Additional RF wall control for 3, 4-way control sold separately
- Compatible with Modern Forms app

WIRELESS PERFORMANCE

RF Pairing Distance: Up to 30 ft from fan

Wi-Fi Range: Up to 150 ft*

ESTIMATED AIR PERFORMANCE

Airflow: 6800 cubic ft per minute on high

Power: 32 watts on high

Airflow Efficiency: 209 cubic ft per minute per watt

RPM: 145 on high/90 average

ORDER NUMBER

Model		Housing	Blade		
FR-W1811-54L	GH	Graphite	DK	Distressed Koa	
	MB	Matte Black	WG	Weathered Gray	

Example: FR-W1811-54L-GH/DK

*Results may vary based on application and surroundings.





OPTIONAL LUMINAIRE (Sold Separately)

Model		Finish	
F-1811-LED	GH MB	Graphite Matte Black	

Example: F-1811-LED-GH



OPTIONAL ACCESSORIES

RF Wall Control	F-WC	WT White	Control fan speed, light brightness and switch between Summer and Winter Modes from up to 30 ft away. One RF Wall control comes standard with each Modern Forms Smart fan.
Wi-Fi Touch Panel Wall Control	F-TS	BK Black WT White	Sold separately. Android tablet comes pre-loaded with Modern Forms app, Wi-Fi range up to 150 ft from router. Results may vary based on application/surroundings.
Downrod Couplers	XF-12 12in XF-18 18in XF-24 24in XF-36 36in XF-48 48in XF-60 60in XF-72 72in XF-1	AS Automotiv BZ Bronze CFI Carbon Fib DW Dark Waln GB Gloss Black GH Graphite GW Gloss Whit	er** Ut Connects two downrods together.
Sloped Ceiling Kit	XF-SCK	MW Matte Whi OB Oil Rubbec SS Stainless S TT Titanium S	Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch. Reel

Examples: RF Wall Control - **F-WC-WT**, Wi-Fi Touch Panel - **F-TS-WT**, Downrod - **XF-12-BZ**, Downrod Coupler - **XF-I-BZ**, Sloped Ceiling Kit - **XF-SCK-DW NOTE:** Recommended maximum downrod length of 72" with 80" lead wire.

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13′	12′	11′	10′	9′
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

^{**}Carbon Fiber downrods available in 12", 18", 24" and 36"