KALLISTA

One™ Thermostatic Valve Trim

FEATURES

UKES CODES/STANDARDS APPLICAT

Solid brass construction for durability and reliability

Allows the bather to set precise temperature

- Patented K-joint installation ensures consistent trim appearance, regardless of variability in valve rough-in
- Complements the One Collection


CODES/STANDARDS APPLICABLE


Specified model meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- ADA
- ICC/ANSI A117.1



ADA

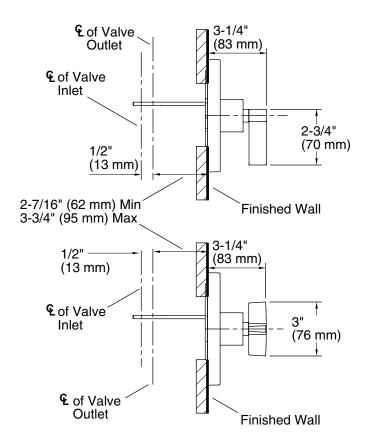





SPECIFIED MODEL		
Model	Description	Finishes
P24421-CR	One Thermostatic Valve Trim,	☐ CP Polished Chrome ☐ AD Nickel Silver ☐ BL Matte Black ☐ SN Polished Nickel
	H&C, Cross Handles	☐ ULB Unlacquered Brass ☐ AG Brushed Nickel ☐ GN Gunmetal
P24421-LV	One Thermostatic Valve Trim,	☐ CP Polished Chrome ☐ AD Nickel Silver ☐ BL Matte Black ☐ SN Polished Nickel
	H&C, Lever Handles	☐ ULB Unlacquered Brass ☐ AG Brushed Nickel ☐ GN Gunmetal
Required Rough-In		
P29511-WS	1/2" Thermostatic Mixing Valve	□ NA
P29512-WS	3/4" Thermostatic Mixing Valve	□ NA

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.