

Nuda 100 bilateral floor white

SPECIFICATIONS

T083908



Design By

Ernesto Gismondi

Collection

Outdoor



Specifications

Delivered lumens	250lm
Light output ratio	14.71lm/W
Power consumption	17W
Led type	6X14.7W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	On/Off
Input Voltage	120-277V
Driver	MAGTECH - 1 x LP1026-36-C0700
BUG Rating	B0-U3-G1

Colors & Finishes

White RAL9002


Materials

- Body in aluminum
- UV resistant diffuser in shock resistant polycarbonate

Features & Accessories

- Provided with IP65 cables and connector for the main connections
- Mounting plate contains holes for ground fixing by means of included lock bolts and dowels
- Electronic driver integrated in body
- Standard non dimmable
- For dimming options, please consult with your Artemide Sales Representative

Dimensions

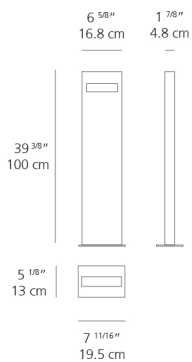

Packaging

1 Box


1 x 46-1/8" x 11-7/8" x 8-3/16" / 16.62 lbs - 117 cm x 30 cm x 20.5 cm / 7.54 kg

Light distribution

Direct

Luminaire weight

11.49 lbs / 5.21 kg



Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane

Warranty

5 year limited warranty