

# Vault™ Top-/Under-Mount Kitchen Sink K-3894-4

### **Features**

- 27-inch minimum base cabinet width.
- Single bowl.
- 6-inch depth.
- Three faucet holes with one accessory hole to the right.
- Rear drain increases workspace in the sink and storage space underneath.
- SilentShield® sound-absorption technology offers quieter performance.
- For under-mount installation, countertop thickness cannot be greater than 1 inch (25 mm) for ADA compliance.
- Includes installation hardware.

### Material

Handcrafted from 18-gauge stainless steel.

## Installation

Top-mount or under-mount.

## **Recommended Products/Accessories**

K-8801 Sink Strainer K-8799 Sink Strainer

## **Optional Products/Accessories**

1177161 Installation Clip Kit

# **Included Components**

Product consists of: 1130570 Hardware Kit, Self-Rimming



ADA

# Codes/Standards

ASME A112.19.3/CSA B45.4 ADA ICC/ANSI A117.1


# **KOHLER® One-Year Limited Warranty**


See website for detailed warranty information.







# Vault™ Top-/Under-Mount Kitchen Sink K-3894-4

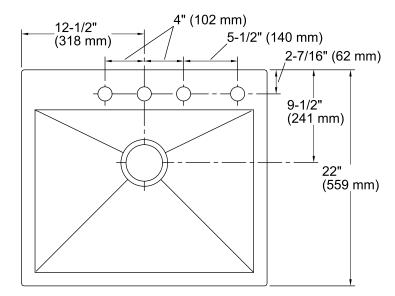



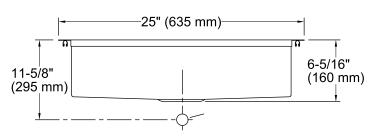



## **Technical Information**

All product dimensions are nominal.

Bowl configuration: Single

Installation: Top-mount, Under-mount

Min. base cabinet 27" (686 mm)

width:

Bowl area (Only): Length: 22-1/4" (565 mm)

Width: 16-9/16" (420 mm) Bowl depth: 6" (152 mm) Water depth: 6" (152 mm)

Number of deck holes: 4

Faucet hole spacing: 4" (102 mm)

Faucet hole(s): 1-7/16" (37 mm)

Soap/Lotion hole: 1-7/16" (37 mm)

Drain hole: 3-3/4" (94 mm)

Template: 1130822-7, required, included

### **Notes**

Install this product according to the installation instructions.

Hardward Kit 1177161 needed for countertops with a 2-1/2" (64 mm) thickness or less.

For under-mount installation, counter top

thickness can not be greater than 1" (25 mm) for ADA compliance.

ADA compliant when installed to the specific

requirements of these regulations.

