TOL0006



Design By

Michele De Lucchi Giancarlo Fassina

Collection =

Design





Colors & Finishes =



Features & Accessories

Specifications •

Delivered lumens

Light output ratio

Life expectancy

Control type

Input Voltage

Driver

Led type

Power consumption

CCT (Correlated Color Temperature)

CRI (Color Rendering Index)

- Fully adjustable, articulated arm structure
- Tiltable and rotatable diffuser (90 degrees in both directions)
- Tunable White technology allows color temperature to range from 2,500K to 10,000K • Interchangeable plug options accommodate most electrical outlets for global diversity

2532lm

35lm/W

150W

N/A

>80

50000Hrs

120-240V

Plug-In


DIMMABLE (Base of diffuser)

11W Array*

Materials |

- Arms and diffuser in aluminum
- Joints and tension control knobs in polished die-cast aluminum
- Tension cables in stainless steel
- Base in weighted steel with stamped aluminum cover

Dimensions •

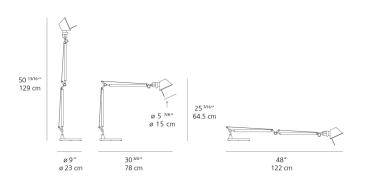

Luminaire weight

10.42 lbs / 4.73 kg

Warranty = 5 year limited warranty

Light distribution

Direct

Red = Max Cd. Through Vertical plane Blue = Max Cd. Through Horizontal plane

Packaging •

2 Boxes

1 x 10-5/16" x 7-9/16" x 33-3/16" / 4 lbs - 26 cm x 19 cm x 84 cm / 1.815 kg

1 x 12-5/16" x 12-5/16" x 4-1/4" / 8.82 lbs - 31 cm x 31 cm x 10.5 cm / 4 kg

Artemide