

# Strive® Under-Mount Kitchen Sink K-5282

#### **Features**

- 36-inch minimum base cabinet width.
- Extra-large/medium bowls.
- Left bowl is sized to fit a half cookie sheet flat in the bottom of the basin.
- 9-inch depth.
- No faucet holes.
- Rear drain increases workspace in the sink and allows for more storage space underneath the sink.
- SilentShield® sound-absorption technology offers quieter performance.
- Includes divider dishcloth bar, divider utility shelf, and bottom sink rack.
- Includes installation hardware.
- Rounded 10mm corners are easy to clean.

#### Material

Handcrafted from 16-gauge stainless steel.

#### Installation

Under-mount

#### **Recommended Products/Accessories**

K-6445 Sink Rack

K-6647 Right-Bowl Sink Rack

K-6377 Sponge Caddy

K-6378 Kitchen Brush Caddy

K-6379 Kitchen Squeegee

K-6382 Disinfecting Wipes Dispenser

K-6383 Soap Dispenser

K-8618 Paper Towel Holder

K-8619 Flexible Kitchen Mat

K-8801 Sink Strainer

K-8799 Sink Strainer

K-8624 Dish Scraper

#### **Optional Products/Accessories**

K-6667 Wood Cutting Board

#### **Included Components**

Additional Components:

Bottom bowl rack-left

Cut-out template

Divider dish cloth bar

Divider utility shelf

Hardware kit(s) (Qty 3)



#### Codes/Standards

ASME A112.19.3/CSA B45.4


## Lifetime Limited Warranty for KOHLER® Stainless Steel Sinks

See website for detailed warranty information.





### **Strive® Under-Mount Kitchen Sink** K-5282

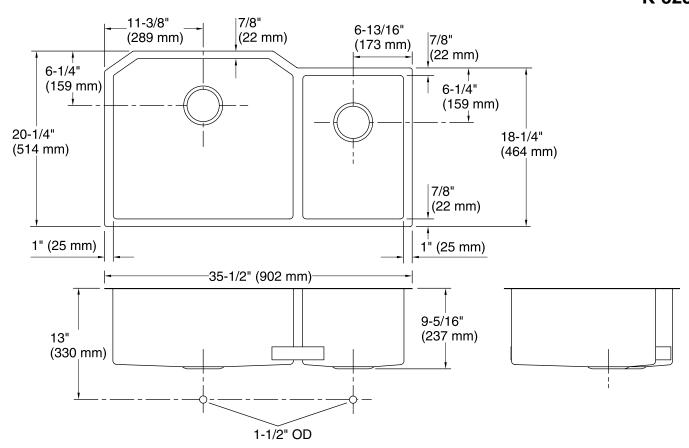

#### **Technical Information**

All product dimensions are nominal.

Bowl configuration: Off-set Large/small

Installation: **Under-mount** Min. base cabinet 39" (991 mm)

width:

Length: 20-3/4" (527 mm) Bowl area (Left):

Width: 18-1/2" (470 mm) Bowl depth: 9-5/16" (237 mm) Water depth: 9" (229 mm)

Length: 11-5/8" (295 mm)

Bowl area (Right): Width: 16-1/2" (419 mm) Bowl depth: 9-5/16" (237 mm)

Water depth: 9" (229 mm)

Drain hole: 3-11/16" (94 mm)

1281147-7, required, included Template:

#### **Notes**

Install this product according to the installation instructions.

Allow a minimum of 3" (76 mm) clearance around the sink rim for clip attachment.

Minimum base cabinet width 36" - 39" (36" may require cabinet modifications). Consult an installer for confirmation.

