

Dual-outlet shower digital interface K-29202

Features

- Integrated push-button diverter provides simple, intuitive control of two shower outlets
- Ability to run each outlet individually or at the same time
- Sleek, minimalist design
- Easy-to-use temperature dial control
- Suitable for dual shower applications
- Duration/countdown timer feature
- Digital thermostatic valve technology guarantees accurate and safe temperature control.
- Adjustable high-temperature limit for added safety
- Compatible with the KOHLER Mode app featuring Bluetooth[®] wireless technology to provide remote on/off capability and setting adjustments

Installation

Wall-mount


Required Products/Accessories

K-528-PM Two-port digital thermostatic valve

Recommended Products/Accessories K-23723 Faucet cleaner

Included Components

Additional Components: Adapter cable Mounting hardware RJ11 Extension Cable 20 ft RJ11 connector Removal tool



Codes/Standards

UL 1951 CSA C22.2 No. 14 CSA C22.2 No. 68

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty

See website for detailed warranty information.

The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description




CP Polished Chrome

BL Matte Black



KOHLER. Faucets

DTV Mode® Dual-outlet shower digital interface K-29202

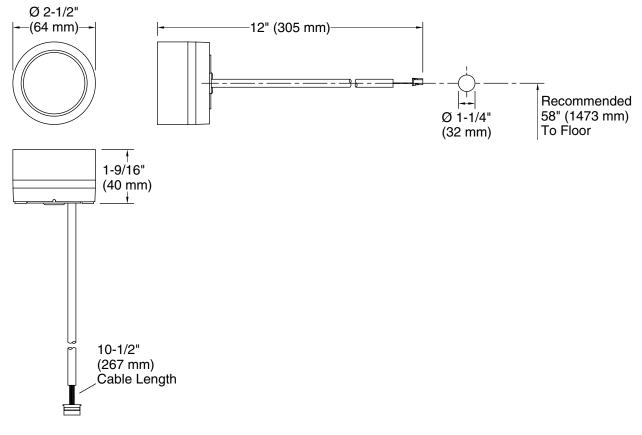

Technical Information

All product dimensions are nominal. Drain included: No Bluetooth® range: 32 ft (9.8 m) Bluetooth® version: 4.1 Max. Ambient temp: 125°F (51.7°C) 120°F (48.9°C) Min. Operating temp: Max. Operating 86°F (30°C) temp: Max. Relative 100% humidity condensing:

Notes

Install this product according to the installation instructions.

