

MICRO

Design by Ramos & Bassols.

Reference

2015.

Application

Outdoor

Installation type

Surface mounted

Description

Diffuser

Polycarbonate diffuser

Materials

Diffuser: Polycarbonate

Body: Aluminum

Plate: Stainless steel

Finishes



2015-03 White (RAL 9016)

Sketch



Electrical characteristics



3 x LED 1W 350mA



Total 3.0 W



VIBIA

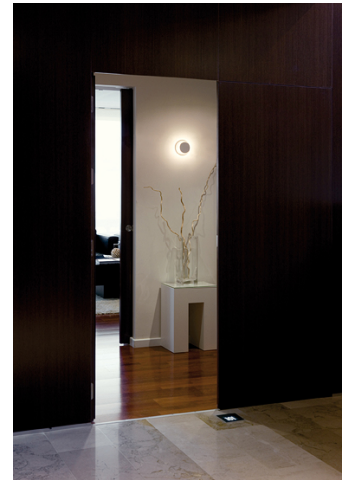

Light source: 2700K CRI >80 365 lm 121 lm/W

Fixture: 105 lm 35 lm/W

Driver included: CC - Constant Current 350 mA 120-240V 50/60Hz

Electronic dimming: NO DIMMING

Installation and assembly

Please see the installation manual


Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

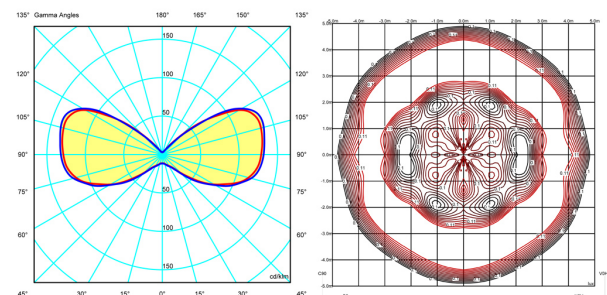

Certificates

