



Greek®

4' Whirlpool Bath

K-1492-H2



Features

- 4 hydromassage jets can be individually adjusted for water flow and direction.
- Variable-speed pump for adjusting massage intensity.
- Built-in heater.
- Electronic keypad.
- Extra-deep basin for full-body soaking.
- Repose vinyl bath pillow for added comfort.
- Reversible drain.
- Under-mountable

Material

- Acrylic

Hydrotherapy

- Whirlpool

Installation

- Drop-in or under-mount

Additional Hydrotherapy Options

- Soaking Bath - 1490-X
- Whirlpool - 1492-H2

Required Products/Accessories

K-9694 4-Jet Trim Kit

Recommended Products/Accessories

K-7166-AF Bath Drain
K-24916 Wireless Music Kit
K-164 Under-Mount Install Kit K-1490-X/1492-H2
K-1179 Vinyl Tiling-in Bead



Codes/Standards




ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2
Greenguard UL 2818 - Gold


KOHLER® Plastic Baths and Receptors
Lifetime Limited Warranty
KOHLER® Hydrotherapy Components
Five-Year Limited Warranty
See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|--|----|---------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 47 | Almond |

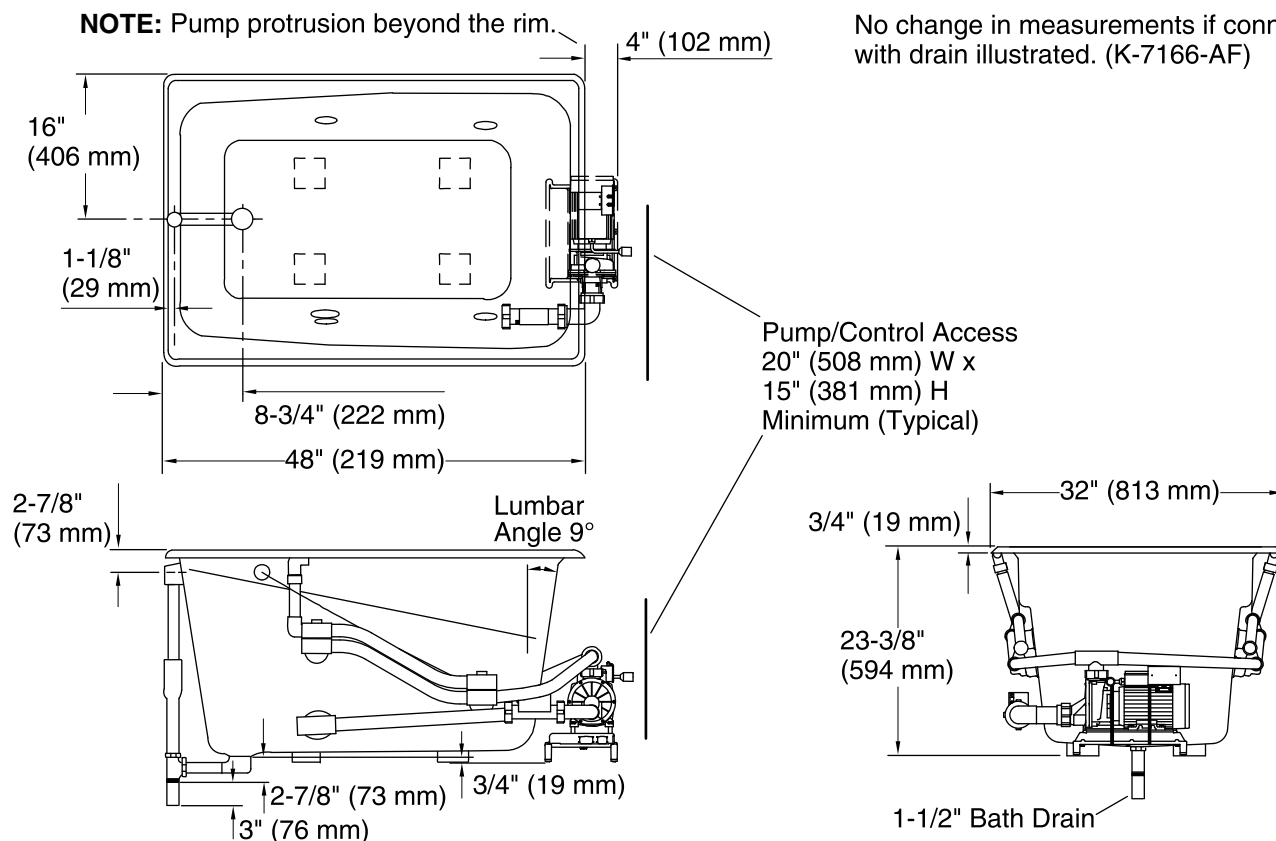

No change in measurements if connected with drain illustrated. (K-7166-AF)

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 240 V, 20 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

| | |
|------------------------------|---|
| Installation: | Drop-in |
| Drain location: | End |
| Basin area, bottom: | 36" x 20-1/2" (914 mm x 521 mm) |
| Basin area, top: | 42" x 26" (1067 mm x 660 mm) |
| Weight: | 103 lbs (46.7 kg) |
| Minimum floor load: | 65 lbs/ft² (317.4 kg/m²) |
| Water depth: | 17-1/2" (445 mm) |
| Water capacity: | 68 gal (257.4 L) |
| Cutout: | Drop-in, 46-1/2" x 30-1/2" (1181 mm x 775 mm) |
| Electrical component rating: | Pump: 240 V |
| Pump speed: | Variable |

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

NOTE: Pump protrudes beyond rim.