

PIN

Design by Ichiro Iwasaki.

Reference

1680.

Application

Wall Fixtures

Installation type

Surface mounted

Description

Wall lamp. Design by Ichiro Iwasaki. Wall light for reading, ideal for bedrooms. The diffuser can turn and rotate to bring the light to where it is needed. Available in black and cream matte finishes.

Diffuser

Polycarbonate diffuser

Materials

Head: Aluminum

Base: Zinc aluminum alloy

Diffuser: Polycarbonate

Rods: Steel

Finishes




1680-04 Black (NCS 9000N)



1680-58 Cream (NCS S 2005-Y20R)

Sketch



Electrical characteristics

1 x LED 4.5W 350mA



Total 4.5 W



VIBIA



Light source: 2700K CRI >90 449 lm 109 lm/W

Fixture: 208 lm 0 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming: NO DIMMING

Technical characteristics

- On/off switch on the wall plate


Installation and assembly

Please see the installation manual

Light distribution

Reading

Lamp having a light beam whose main function is to supply sufficient light for reading.



Photometric data

Efficiency : 46.31%

Coordinate system : CG

Total flux : 449.94

Maximum value : 193.70

Light position : C=75.00 G=5.00


Symmetry on the planes : Symmetrical planes

270-90

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=1.80m

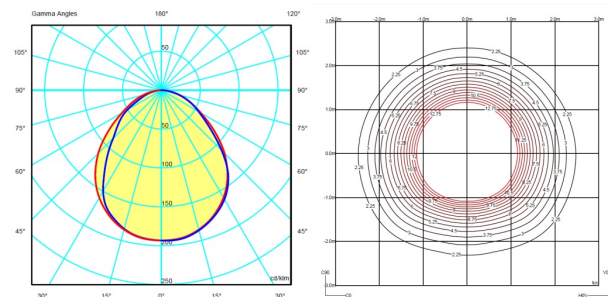

Certificates

