

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Bandeau

Outdoor Wall Sconce

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
WS-W21110 10"	3000K 90	BK Black	8W	600	180
	3500K 90		8W	600	192
	4000K 90		8W	600	180

Example: **WS-W21110-40-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Just the right bandwidth to stream illumination

FEATURES

- Silk screen mitered tempered glass diffuser
- 3CCT (3000K/3500K/4000K) selectable switch
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	4000K,3500K,3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8-2019 Compliant Wet Location Listed
Construction:	Aluminum body, glass diffuser

REPLACEMENT PARTS

- RPL-GLA-21110-OUT - Outer Glass
- RPL-GLA-21110-IN - Inner Glass




FINISHES:



Black

LINE DRAWING:

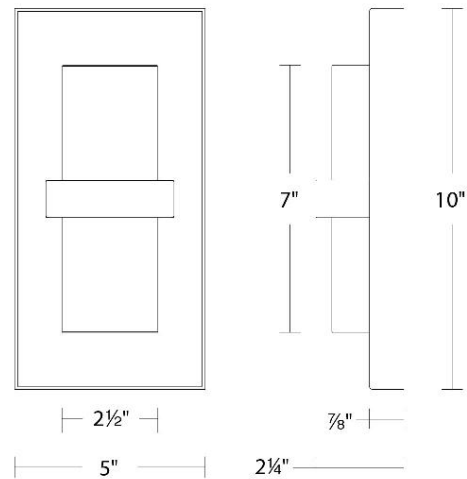

WS-W21110

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Bandeau

Outdoor Wall Sconce

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
WS-W21116 16"	3000K 90	BK Black	17W	1200	465
	3500K 90		17W	1200	494
	4000K 90		17W	1200	464

Example: **WS-W21116-40-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Just the right bandwidth to stream illumination

FEATURES

- Silk screen mitered tempered glass diffuser
- 3CCT (3000K/3500K/4000K) selectable switch
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	4000K,3500K,3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8-2019 Compliant Wet Location Listed
Construction:	Aluminum body, glass diffuser

REPLACEMENT PARTS

- RPL-GLA-21116-OUT - Outer Glass
- RPL-GLA-21116-IN - Inner Glass




FINISHES:



Black

LINE DRAWING:

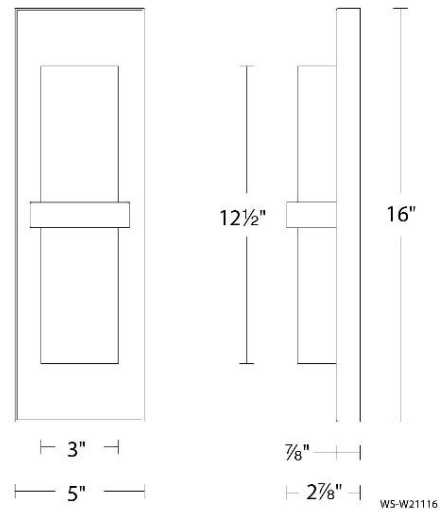

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Bandeau

Outdoor Wall Sconce

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
WS-W21122 22"	3000K 90	BK Black	20W	1600	697
	3500K 90		20W	1600	734
	4000K 90		20W	1600	702

Example: **WS-W21122-40-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Just the right bandwidth to stream illumination

FEATURES

- Silk screen mitered tempered glass diffuser
- 3CCT (3000K/3500K/4000K) selectable switch
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	4000K,3500K,3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8-2019 Compliant Wet Location Listed
Construction:	Aluminum body, glass diffuser

REPLACEMENT PARTS

- RPL-GLA-21122-OUT - Outer Glass
- RPL-GLA-21122-IN - Inner Glass




FINISHES:



Black

LINE DRAWING:

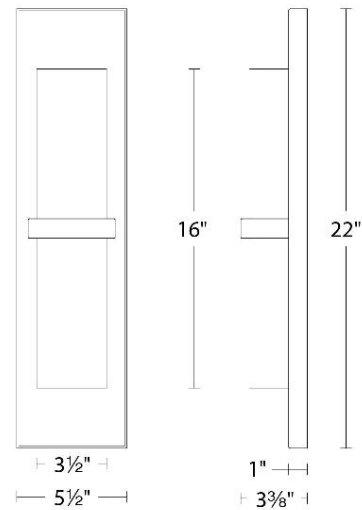

WS-W21122