

# **Underscore® Rectangle**

5' Bath **K-20202-LA** 



### **Features**

- Convenient 19-inch step-over height retains the same depth as a standard 21-inch bath.
- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.
- Integral apron creates a clean, finished look.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Textured bottom surface.
- Left-hand drain.
- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately).

### Material

Acrylic

#### Installation

Three-wall alcove.

## **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain

K-7272 PVC Slotted Overflow Bath Drain



### ADA

#### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold ADA ICC/ANSI A117.1

## KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


0 White






# **Underscore® Rectangle**


5' Bath K-20202-LA

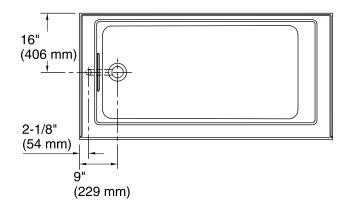

No change in measurements if connected with drain illustrated. (K-7272)



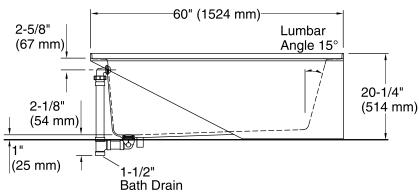



#### **Technical Information**

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Left

Basin area, bottom: 46-1/4" x 22" (1175 mm x 559 mm) Basin area, top: 52" x 24" (1321 mm x 610 mm)

Weight: 100 lbs (45.4 kg)
Minimum floor load: 56 lbs/ft² (273.4 kg/m²)

Water depth: 15-1/2" (394 mm)
Water capacity: 68 gal (257.4 L)
Minimum flat for door: 2-3/4" (70 mm)

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

