

WAC LIGHTING

Xenon HR-86

Low Voltage Button Lights

| Model | Finish |
|-------|-------------------|
| HR-86 | BK Black |
| | BN Brushed Nickel |
| | CB Copper Bronze |
| | DB Dark Bronze |
| | WT White |

Example: **HR-86-BK**

DESCRIPTION

Designed with a low-profile and shallow installation depth for tight spaces, the innovative xenon and halogen Button Lights can be surface mounted or recessed for a built-in look within shelves, under and inside cabinets, curios and displays in fine residential and retail environments. Includes 72" of wire, button lights can be wired in a series to one another up to the maximum load on the power supply used.

FEATURES


- All steel construction
- Cutout template included for recessed installations
- Supplied with 72" wires
- Low profile and shallow installation depth
- Recessed or surface mounting
- Lamp included
- Dimmable with electronic low voltage dimmers
- Must be used with a Class 2 power supply
- Transformer required

SPECIFICATIONS


| | |
|-----------------|--|
| Construction: | Steel |
| Power: | 20W |
| Input: | 12/24 VAC, 50/60Hz |
| Light Source: | Xenon |
| Rated Life: | 10000 Hours |
| Mounting: | Recessed 2a" cutout hole. Compression springs hold fixture firmly in place., Can be mounted on wall in all orientations |
| Cut Out: | 2.38 |
| Finish: | Electrostatically Powder Coated Dark Bronze, Electrostatically Powder Coated White, Electroplated Brushed Nickel, Electrostatically Powder Coated Black, Electroplated Copper Bronze |
| Operating Temp: | -4°F to 104°F (-20°C to 40°C) |
| Standards: | UL, cUL, Damp Location Listed, ADA |



FINISHES



LINE DRAWING

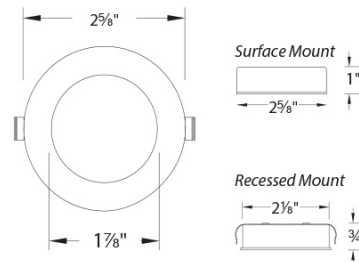

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Xenon HR-86 Low Voltage Button Lights

ACCESSORIES

| | <i>Model</i> | <i>Description</i> | <i>Finish</i> |
|---|---|--|--|
|  | EN-12120-RB2 EN-12180-RB2 EN-12300-RB2 EN-1260-RB2 | <i>Enclosed Electronic Transformer</i> <i>Enclosed Electronic Transformer</i> <i>Enclosed Electronic Transformer</i> <i>Enclosed Electronic Transformer</i> | <i>Black</i> <i>Black</i> <i>Black</i> <i>Black</i> |
|  | EN-2460-RB2 EN-24100-RB2 | <i>Class 2 Enclosed Electronic Transformer</i> <i>Class 2 Enclosed Electronic Transformer</i> | <i>Black</i> <i>Black</i> |
|  | EN-1260-P-AR-BK EN-1260-P-AR-WT | <i>120V/12V 60W Plug-In Electronic Transformers</i> <i>120V/12V 60W Plug-In Electronic Transformers</i> | <i>Black</i> <i>White</i> |
|  | MTB-01 | <i>Multiple Terminal Block</i> | <i>Black</i> |
|  | LENS-45-FR-N | <i>Clear/Frosted Lens</i> | <i>Frosted</i> |