


Starck 2 Toilet close-coupled # 2129090092

| < 14 3/4" Inch > |

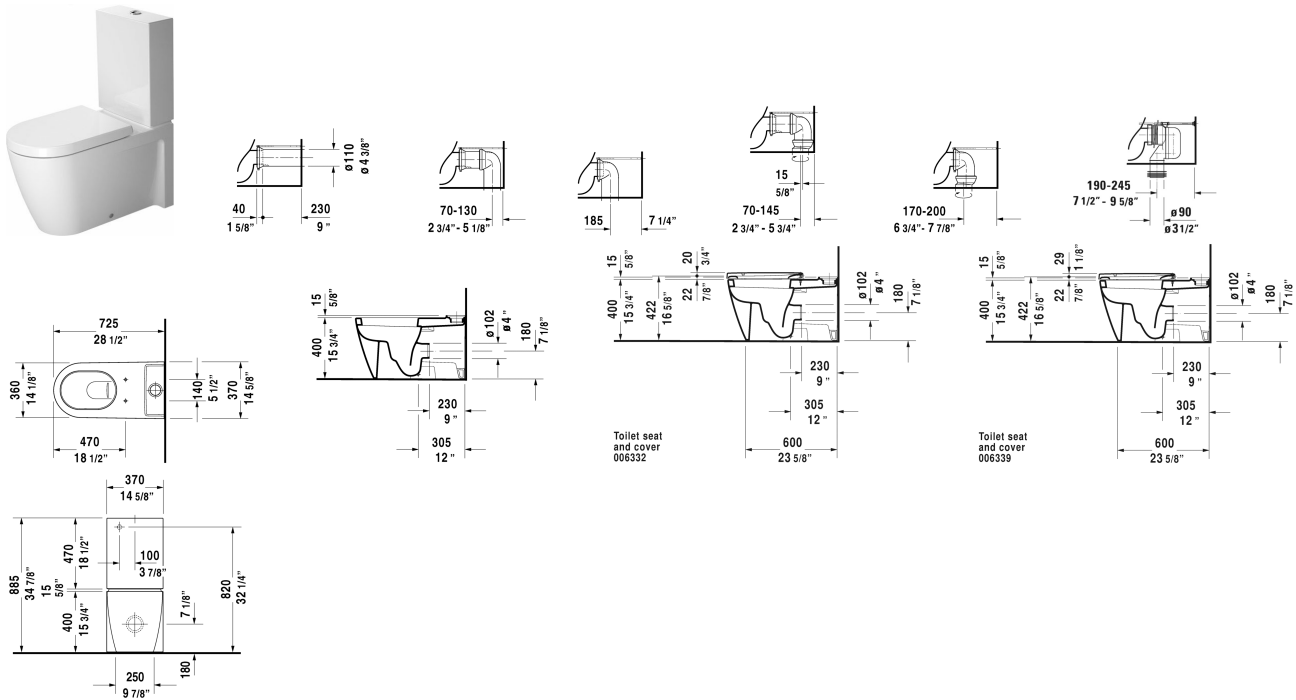

Toilet close-coupled	Dimension	Weight	Order number
(without tank), washdown model, suitable for SensoWash Starck, hardware included, cUPC listed			
Colors			
00 White			
Variant			
♦ 1.6/0.8 gpf, outlet for vario connector set, for horizontal and vertical outlet, length adjustable from 2 3/4" - 7 7/8", and vario 14 3/4" x 28 3/8" Inch connecting bend, vertical outlet from 7 1/2" - 9"		86 lb	2129090092
Infobox			
For Starck 2 toilets manufactured before February 2012, the toilet seats without soft-close # 0066910000 and with soft-close # 0066990000 are suitable, For suitable SensoWash® shower-toilet seats, please see matrix on page xxx			
Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come. When ordering WonderGliss please add a "1" as eleventh digit to the model number.			
Vario connecting bend for vertical outlet		1.5 lb	899025

Starck 2 Toilet close-coupled # 2129090092

| < 14 3/4" Inch > |

Vario connector set incl. offset	Ø 4 3/8" Inch	3.3 lb	001422
Suitable products			
SensoWash Starck shower-toilet seat for Starck 2, Starck 3 and Darling New* remote control included, power actuated lid and seat, rear-, front and oscillating wash, individual adjustment of water-, air- and seat surface temperature as well as nozzle position and jet strength, self-cleaning wand, 2 individually programmable user profiles, night light, Quick release: easy seat unit removal and attachment, on / off-button, 14 5/8" x 20 1/4" Inch	14 5/8" x 20 1/4" Inch		610000
Tank with dual flush mechanism, Chrome, concealed left supply, cUPC listed, 14 5/8" x 5 3/4" Inch	14 5/8" x 5 3/4" Inch		093300
Toilet seat and cover elongated, hinges stainless steel, without slow close,			006332
Toilet seat and cover elongated, hinges stainless steel, removable, with slow close,			006339

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.