KOHLER_®

Wellworth® Two-piece round-front dual-flush toilet K-3987-BA

Features

- Two-piece design.
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms.
- Right-hand nested trip lever offers a choice of 1.1 or 1.6 gallons per flush (gpf).
- 2-1/8" (54 mm) fully glazed trapway.
- Coordinates with other products in the Wellworth collection.
- Combination consists of the K-4197 bowl and the K-4458-RA tank.

Technology

 Dual-flush technology allows you to choose between a full or partial flush.

Installation

- Seat sold separately.
- Standard 12" (305 mm) rough-in.
- Three-bolt quick-connect installation.

Water Conservation & Rebates

• Eligible for consumer rebates in some municipalities.

Recommended Products/Accessories

K-4639 Cachet® Quiet-Close[™] round-front toilet seat K-5589 Purefresh® Round-front toilet seat K-76923 Puretide® Quiet-Close[™] round-front toilet seat with antimicrobial agent K-5420 Low-Profile Bolt Caps K-9236 Trip Lever Dual Flush 1023457 1265114 K-23726 Drain treatment

Included Components

Product consists of: 4458-RA 4197 9236 Additional Components: Bolt cap accessory pack Bowl Tank Tank Tank cover Trip lever





Codes/Standards ASME A112.19.2/CSA B45.1 ASME A112.19.14 EPA WaterSense®

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

0	White
96	Biscuit





Wellworth® Two-piece round-front dual-flush toilet K-3987-RA

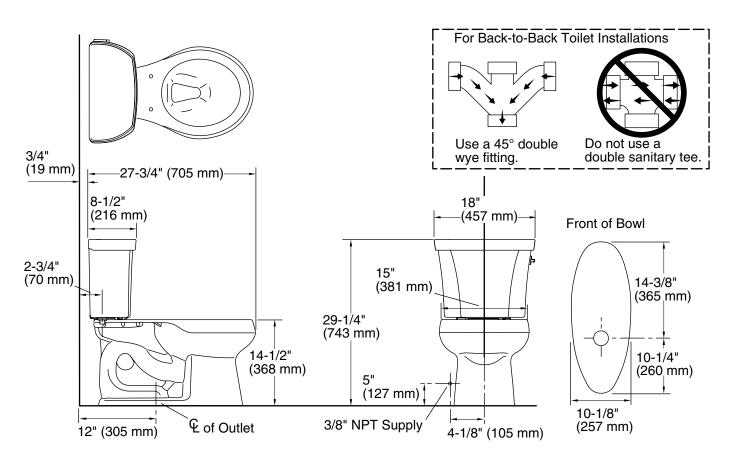

Technical Information

All product dimensions are nominal. Toilet type: Floor-mount Waste Outlet: Floor Round-front Bowl shape: Flush type: Class Five® Trap passageway: 2-1/8" (54 mm) Water Consumption Full: 1.6 gpf (6 lpf) Reduced: 1.1 gpf (4.3 lpf) Water surface size: 10-1/2" x 7-3/4" (267 mm x 197 mm) Rim to water 5-1/4" (133 mm) surface: Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm) holes:

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

