PRODUCT FEATURES

- Uniquely designed chandelier with the flexibility of a custom lowvoltage rail system
- · Classic Aged Brass finish adds charm and style
- · Customizable using frosted glass globes or cylinders
- · Ideal for living rooms, dining rooms, and home offices
- · Fully dimmable integrated LED light source
- 1-year warranty with no lamping option. 5-year warranty with LED lamping option



LAMPING

Ships with (12) 6 up/down & 6 horizontal 24 volt 3 watt, 2024 total delivered lumens, 3000 K, integrated LED modules. Dimmable with most LED compatible ELV and TRIAC dimmers. Ships with 78" of field cuttable aircraft cable, (2) 6" stems and (4) 12" stems in coordinating finish. Remote Power Supply version T24. Can be installed on a sloped ceiling up to 45° .





Glass Cylinders

Glass Orbs

ORDFRING INFORMATION

| 700MDCH | COLOR | FINISH | LAMP |
|---------|-------------------|--------------|---------------------------|
| | C GLASS CYLINDERS | R AGED BRASS | R 24V REMOTE CANOPY (T24) |
| | G GLASS ORBS | | S 24V SURFACE CANOPY |

700MDCH JOB NAME NOTES




MODERNRAIL CHANDELIER 2

TECH LIGHTING

SPECIFICATIONS

| HARDWARE MATERIAL | Metal | | |
|-------------------------------|------------|--|--|
| SHADE MATERIAL | Glass | | |
| NET WEIGHT | 7 lbs | | |
| HEIGHT | 12.9in | | |
| WIDTH | 48in | | |
| LENGTH | 48in | | |
| UP LIGHT / DOWN LIGHT / BOTH? | | | |
| WET LISTED | | | |
| DAMP LISTED | Yes | | |
| DRY LISTED | | | |
| MIN. HANGING HEIGHT | 20.4in | | |
| MAX HANGING HEIGHT | 80.4in | | |
| TOTAL CORD LENGTH | 78in | | |
| TOTAL STEM LENGTH | | | |
| STEM QTY | | | |
| SLOPED CEILING ADAPTABLE? | N/A | | |
| GENERAL LISTING | ETL Listed | | |
| INCLUDES | | | |

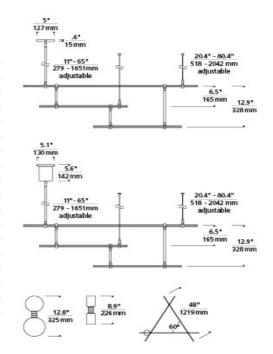

LAMPING SPECIFICATIONS

| | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|----------|--------------------------|---------|---------|
| DELIVERED LUMENS | | Glass Cylinders : 2024.0 | | |
| DELIVERED LUMENS | | Glass Orbs : 1720 | | |
| WATTS | | 70.1 | | |
| MAX WATTAGE PER BULB | | 70.1W | | |
| INPUT VOLTAGE | | 120V | | |
| DIMMING TYPE* | | ELV, TRIAC | | |
| CCT | | 3000K | | |
| CRI | | 90 CRI | | |
| LED LIFETIME | | | | |
| L70 | | >50000 | | |
| AVERAGE BULB HOURS | | | | |
| FIELD SERVICEABLE LED | | | | |
| LAMP BASE | | Integrated LED | | |
| LAMP SHAPE | | Integrated LED | | |
| LAMP INCLUDED? | | True | | |
| WARRANTY** | | 5 Years | | |

^{*} Dimming information available at $\underline{www.techlighting.com/Downloads\#dimming}$

T20/T24/JA8 INFORMATION

| | Integrated LED | Replacement LED Lamp | No Lamp * |
|--|-------------------|-------------------------|--------------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6/JA8. | Yes | | |
| This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California. | N/A | | |

 $^{^*}$ If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.



^{**} Visit techlighting.com for specific warranty limitations and details.