


CHUTE WS14935

WALL


PROJECT

DESCRIPTION

Extruded aluminum cylinder with welded capped ends. Circular wall mount. Finely textured powder-coat finish. Rounded opal silicon diffuser. Outward emitting light. Custom options available.



WS14935-BK
Black




WS14935-WH
White

SPECIFICATION DETAILS

* For custom options, consult factory for details.

Fixture Dimensions	W35-1/2" x H4-3/4" x E1-7/8"
Light Source	LED with DC Driver
Wattage	16W
Total Lumens	1355lm
Delivered Lumens	BK-784lm; WH-958lm;
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included)
Diffuser Details	White Acrylic Diffuser
ADA Compliant	Yes
Compliance	ADA
Location	Dry
Warranty	5 Years
Illumination Direction	Fontlight Illumination
Mounting Style	All Orientation; Wall;
CEC Title 24 JA8	Yes, JA8-19
Canopy Dimensions	D4-3/4" x E1-1/4"

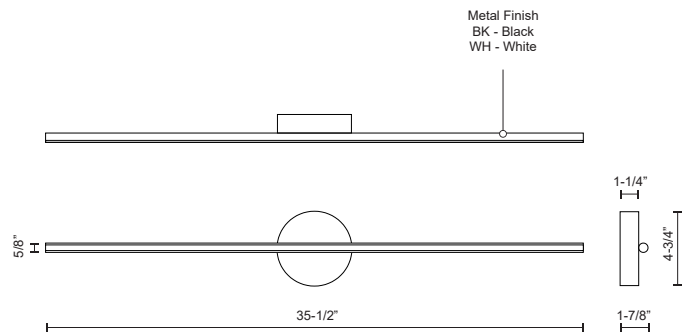

KUZCO

19054 28TH AVENUE
SURREY - BC V3Z 6M3
CANADA

WWW.KUZCOLIGHTING.COM

COMMENT

